



WEDGE MOUNTS, Series DFH and Series DFPH

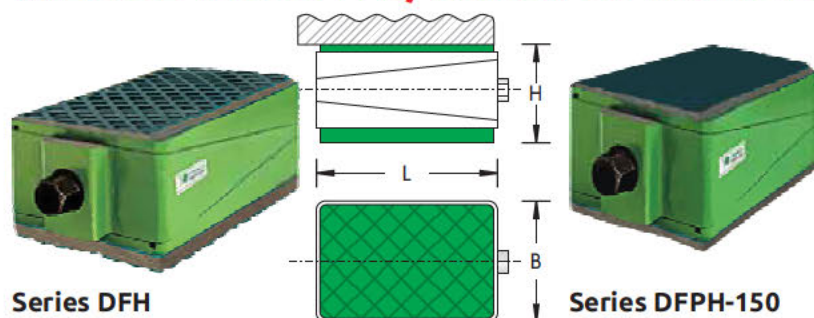

Dynemech's DFH/DFPH Series mounts are sturdy in construction and installed as free standing. They are designed for very heavy and long bedded machines. High levelling adjustment avoids the need of extra shims for installations on steep slope surfaces. DFPH has a height of 150mm to meet TPM requirements. Respective insulation plates are assembled to meet various applications.

Model	Load Kg/pc	Length (L) mm	Width (B) mm	Height (H) at mean position (mm)	Adjust range (mm)
DFH1 u	2250	200	125	96	16
DFH2 u	2700	200	150	128	20
DFH3 u	4284	280	170	158	25
DFH1 m	2500	200	125	90	16
DFH2 m	3000	200	150	122	20
DFH3 m	4760	280	170	152	25
DFH1 i	3500	200	125	106	16
DFH2 i	4200	200	150	138	20
DFH3 i	6664	280	170	168	25
DFH1 h	7500	200	125	90	16
DFH2 h	9000	200	150	122	20
DFH3 h	14000	280	170	152	25

WEDGE MOUNTS, Series DBH and Series DBPH

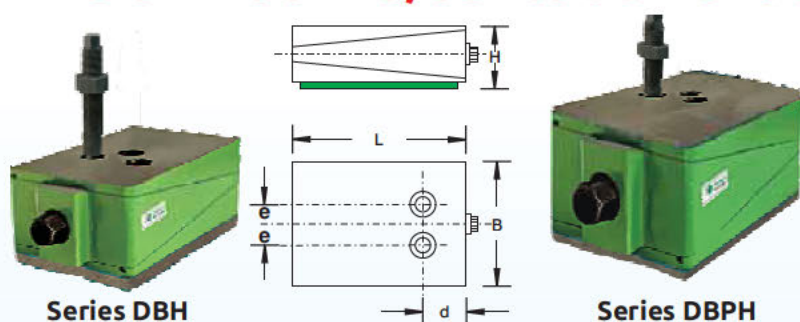

Dynemech's DBH/DBPH Series mounts are sturdy in construction. Wedge Mounts are bolted with the machine base. High levelling adjustment avoids the need of extra shims for installations on steep slope surfaces. DBPH has a height of 150mm to meet TPM requirements. Respective insulation plates are assembled to meet various applications.

Model	Load Kg/pc	Length (L) mm	Width (B) mm	Height (H) at mean position (mm)	d mm	e mm	Bolt Size mm	Adjust range (mm)
DBH1 u	2250	200	125	88	75	25	M20	16
DBH2 u	2700	200	150	120	75	25	M20	20
DBH3 u	4200	280	170	150	145	30	M20	25
DBH1 m	2500	200	125	88	75	25	M20	16
DBH2 m	3000	200	150	120	75	25	M20	20
DBH3 m	4600	280	170	150	145	30	M20	25
DBH1 i	3500	200	125	98	75	25	M20	16
DBH2 i	4200	200	150	130	75	25	M20	20
DBH3 i	6400	280	170	160	145	30	M20	25
DBH1 h	7500	200	125	88	75	25	M20	16
DBH2 h	9000	200	150	120	75	25	M20	20
DBH3 h	14000	280	170	150	145	30	M20	25